

Untitled

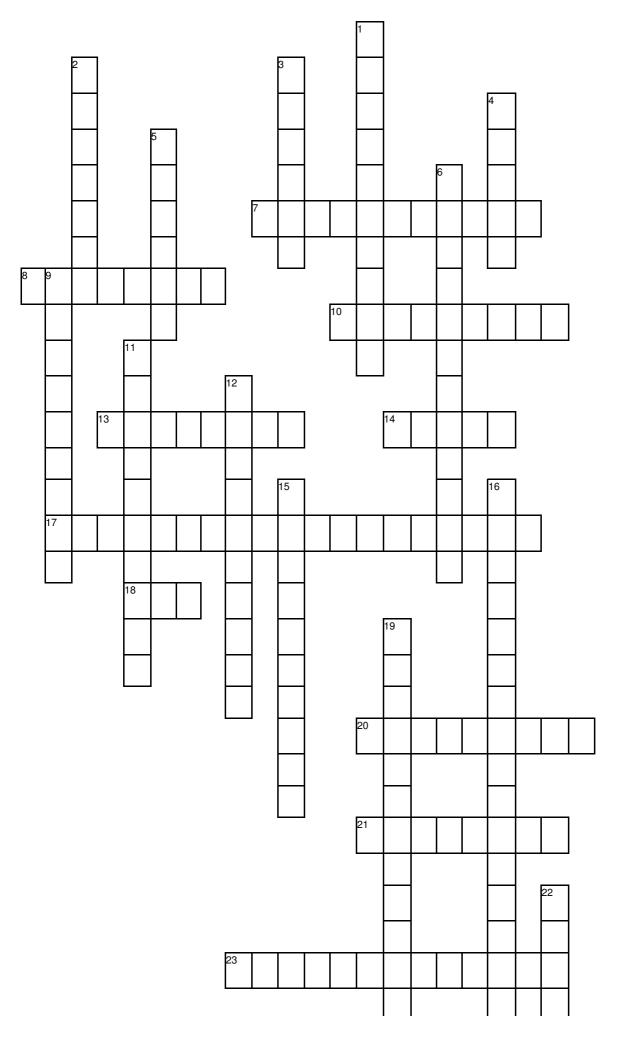



Across

- 7. At the same time.
- 8. day, month, quarter, millisecond, etc.
- 10. SELECT returns a
- 13. It's not real, but it should be real sized.
- 14. Rows and columns switch
- 17. Pass in a value get back rows.
- 18. Greenwich
- **20.** (^J ° □ °)^J ~ ⊥⊥
- 21. A query within a query
- 23. Frankenstein's date
- 24. CROSS or OUTER but not JOIN
- **25.** 30 days hath Sept, April, June and Nov, All the rest have 31, Except Feb that has 28.

Down

- 1. Windowed identity
- 2. CROSS APPLY is an easy way to do this.
- 3. The loop everyone loves to hate.
- 4. Get
- 5. Sphere + AL
- 6. Anchor required
- 9. One from many.

11. Determines the partitioning and ordering of a rowset before the associated window function is applied.

- **12.** Typically found in a development or test database.
- **15.** 1,2,2,3,4,5,6,6,7
- 16. Inline View
- 19. How deep can you go?
- 22. High precision getdate()